

KST[®]

www.KST-servos.com

MS565 Coreless, narrow band



Operation Voltage: DC6.0V - 8.4V

Torque: [4.2Kg.cm@6.0V](#)


[5.5Kg.cm@7.4V](#)

6.5Kg.cm@8.4V

Speed: 0.05sec/60°@6.0V

0.04sec/60°@7.4V

0.035sec/60°@8.4V

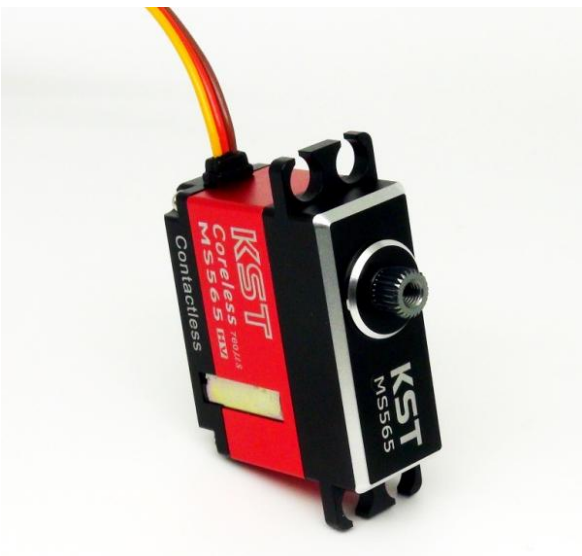

Size: 35.5*15*32.5mm

Working Frequency:760us/560Hz

Weight:38g

Motor: Coreless

Position Sensor: Contactless

Ball Bearing:2BB

Fit for 450-500class helicopter tail,narrow band.